

KEY FEATURES

SUITABLE FOR SLIDE GATES

Suited for Slide Gates up to 12 metres

MYQ CAPABLE

Opener is myQ capable for gates with an additional purchase of Safety IR Beams & myQ Gateway.¹

BATTERY BACKUP COMPATIBLE

Opener is Battery Backup compatible with additional purchase of Battery Backup accessory.²



Compliant to Australian and New Zealand Standard AS/NZS 60335.2.103







SMART

MYQ CAPABLE TECHNOLOGY lets users create schedules, monitor, receive alerts and control the gate opener away from home.¹



SOFT-START AND SOFT-STOP for smooth operation.

SPEED ADJUSTMENT allows you to increase and decrease opening and closing gate speeds.

PEDESTRIAN MODE allows for customised gate opening access.

QUIET & RELIABLE

240V MAINS VOLTAGE



IP44 WEATHER RESISTANT Ingress protection IP44 suitable for outdoor installation.

QUIET DC MOTOR eliminates noise and vibrations, providing smooth operation.

BATTERY BACKUP ensures access even when the power is out.²

SLIDING GATES UP TO 12 METRES

SAFE & SECURE

SECURITY+ 2.0° sends a new code with every remote click.

PREMIUM AUTOMATIC SAFETY REVERSE function will allow your gate to stop and reverse automatically if obstructed during opening or closing.

TIMER-TO-CLOSE automatically closes the gate after a pre-set amount of time. 3

[MPROVED TRANSMITTER RANGE has up to 18% better range meaning you can start opening your gate sooner.⁴

AUTOMATIC FORCE SENSING monitors and adjusts the force needed to open your gate with each operation.

DISENGAGEMENT MECHANISM allows you to manually open the gate whenever needed.

Accessories Included



Four Button Remote Controls

Premium remotes to control up to 4 garage doors or gates. Each button can be programmed to Security+ and Security+2.0 devices.

Powerful Add-Ons



Gate myQ Connectivity Bundle

Add monitoring and control away from home. Includes myQ Gateway and The Outdoor Protector System (Safety IR Beams).



Battery Backup

Get in and out when the power's out with Battery Backup. Batteries fit within the housing of the opener.



Wireless Security Keypad

Convenient and safe access to open and close your gate without using a remote control or key.



E-Lock for Horizontal Installation

For additional security with electric lock. Includes 3 keys.



E-Lock for Vertical Installation

For additional security with electric lock. Includes 3 keys.



Mag-Lock

Additional security with magnetic lock.



Slide Gate Stop

Additional security for slide gates.



Rack

Additional 1m racking.



Outdoor Protector System

Safety IR Beams for outdoor gate applications (IP44).

grifco.com.au • grifco.co.nz

¹ Additional purchase of Grifco myQ Gateway and Safety IR Beams accessories required to enable myQ functionality. Visit grifco.com au for further information. ² Additional purchase of Grifco Battery Backup accessory required to enable Battery Backup functionality. Visit grifco.com au for further information. ³ Safety IR Beams must be installed to enable the use of Timer-to-Close. See User Guide for additional information. ⁴ When compared to other available products.



SUITABLE FOR SLIDE GATES **UP TO 12 METRES**









LIGHT COMMERCIAL / HEAVY RESIDENTIAL GATE OPENER

Start with smart. Compatible with myQ²

Additional purchase of The Outdoor Protector System and myQ Gateway is required



FOR SLIDING GATES

- Monitor and control your gate away from home through the myQ App.
- Peace of mind knowing if gate is open or closed anywhere and any time.
- Receive real time alerts and notifications so you know when the gate is opened or closed by loved ones.

APP AVAILABLE ON:






Pre-set times to automatically close your gate at any time.

- See history records of your gate open and close periods.
- Protect your loved ones and belongings with The Outdoor Protector System (Safety IR Beams).
- Compatible myQ App available for smart devices including Apple Watch.

TYPICAL INSTALLATION - SLIDE GATES

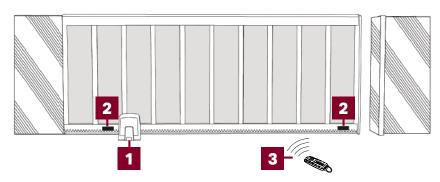

- 1. Gate Opener (GGS1000)
- 2. Limit Switch Brackets
- 3. Remote Control (E960G)
- Maximum Weight for single gate:
- Maximum Width for single gate:



SECURITY+ 2.0°

- Encrypted rolling code across multiple frequencies.
- Security+ 2.0° technology virtually eliminates interference.



- Provides 2-way communication from gate openers and accessories.
- Receiver with 64 memory register.

Standard Specifications

- · Main AC Supply: 220-240VAC:50/60Hz
- Motor Voltage: 24 VDC
- · Input Power: 150 W
- **Ambient Temperature** Range: -20-+55*C
- Maximum Pull Force: 800 N
- Maximum Torque: 22.5 Nm
- · Radio frequency: 433.30, 433.92, 434.54 MHz with Security+ 2.0 technology
- · Compatible with myQ Technology¹
- · Gate Opener Capacity of up to 64 memory registers

GRIFCO°

AUSTRALIA

Chamberlain Australia Pty Ltd PO Box 1446 North Ryde NSW 2113

www.grifco.com.au **1800 GRIFCO**

NEW ZEALAND

Chamberlain New Zealand Limited 17B Arrenway Drive Rosedale 0632, Auckland

www.grifco.co.nz 0800 653 667

Designed & Engineered in Australia © 2024 The Chamberlain Group LLC. All Rights Reserved. ® Registered Trade Marks of The Chamberlain Group, Inc. ™ Trade Marks of Chamberlain Group, Inc.



WARNING!

Product contains coin/button cell batteries. The battery is hazardous. Keep product and batteries away from children. Battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button cell battery has been swallowed or placed inside any part of the body.